

SCC-B5203

1/3" Color Fixed Dome Camera




- Horizontal resolution : 520 TV Lines
- Minimum scene illumination : 0.15(color)/0.015(B/W) Lux
- Compact size of 85(ø)x54(H)mm
- Pan/Tilt adjustment to a wide range of angles
- Sharp image quality, with an excellent signal-to-noise ratio (50dB)
- Easy to install (Ceiling-mountable)
- Exterior Color : SCC-B5203S (Silver)
SCC-B5203 (Black)

Specifications

Model	SCC-B5203		SCC-B5203P
Imaging Device	1/3" Super HAD CCD		
Effective Pixels	768(H)x494(V)		752(H)x582(V)
Scanning Method	2 : 1 Interlace		
Scanning Line	Horizontal	15.750Hz	15.625Hz
Frequency	Vertical	60Hz	50Hz
Synchronization Method	Internal		
Horizontal Resolution	520 TV Lines		
Signal Output	VBS 1.0Vp-p(75 Ohm, Composite)		
S/N Ratio	50dB		
Minimum Scene Illumination	Color	0.15(Sens up Off,15IRE)Lux	
	B/W	0.015(Sens up Off,15IRE)Lux	
PAN / TILT	330°(Manual) / 10°~ 90°(Manual)		
Control Switch	BLC	On	
	AGC	On	
	ELC	On(Max. 1/120Ksec)	
	White Balance	ATW/AWC	
Lens	Focal Length	3.0mm fixed lens	
	Aperture Ratio	F2	
	Viewing Angle	94.4°(H)x69.5°(V)	
Input/Output	Image Output	BNC	
	Power	2-pin Terminal	
Operating Temperature	-10°C ~ +50°C		
Operating Humidity	Less than 90%		
Power Requirement	DC12V		
Power Consumption	2W		
Weight	125g		
Dimensions	85(ø) x 54(H)mm		

Dimensions (unit:mm)

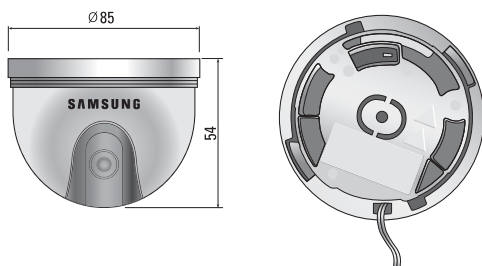

* Design and specifications are subject to change without notice.



SAMSUNG ELECTRONICS CO., LTD.

Digital AV Division
VSS marketing, 416, Maetan 3 Dong, YeongTong-Gu, Suwon City, Kyeonggi-Do, Korea, 443-742
Tel: +82-31-277-3342-3347 Fax: +82-31-277-6597 www.samsungsecurity.com