


# Video Door Phone One to Four Kits

## CCVD-104

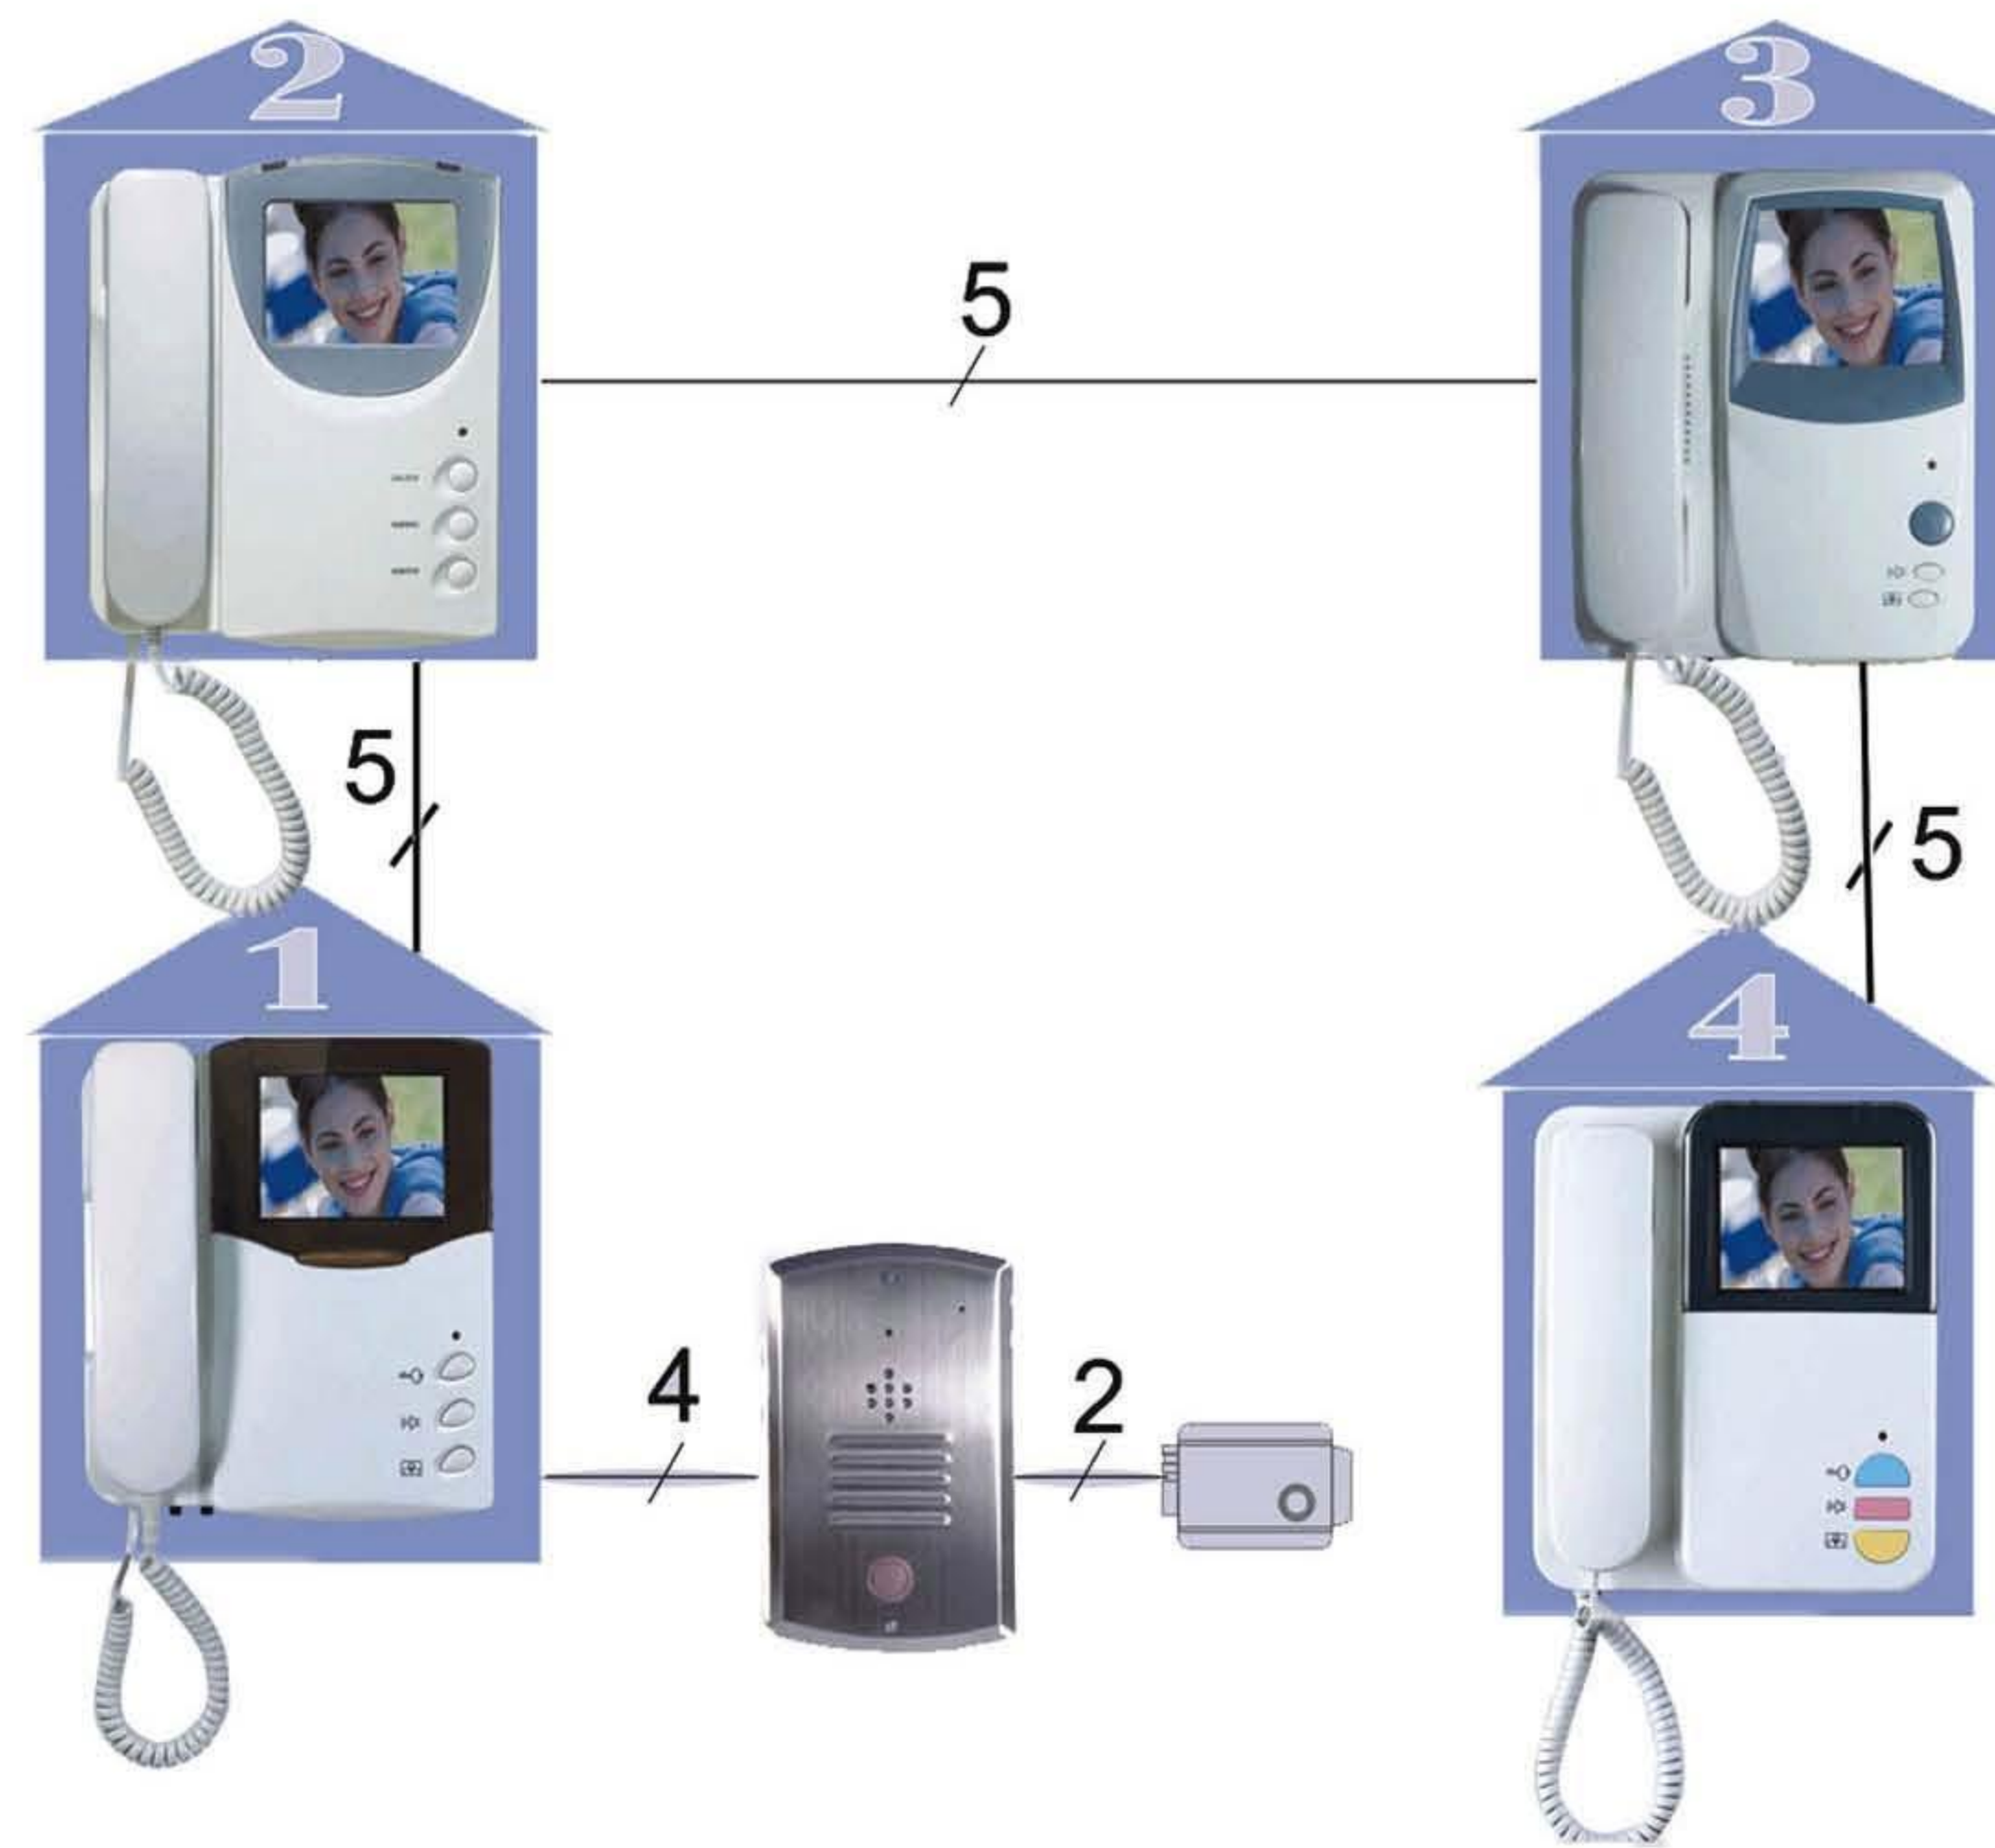

### Features:

- λ Expansibility: Up to 4 indoor monitors in one house.
- λ Compatibility: Can be compatible with 5 different outdoor cameras.
- λ Wiring: 5-wires between monitors; four wires between door station and the first monitor
- λ Installation: Monitor-surface mounted; Cameras-flush mounted.
- λ Chime: Ding-Dong ring or single tone melody ring for option.
- λ Switch Mode Power Supply (SMPS): AC100~240V/50-60Hz.
- λ Remote Unlock: Electric-controlled door unlocking. Electric door lock is required (sold separately).
- λ Video and two way intercom system.
- λ Noctilucent calling button.
- λ RJ11 socket or terminal strip connections are optional.

### Specifications:

Item No.	CCVD104C	CCDV104BW
	\$788	\$488
<b>Indoor Monitor</b>		
Picture Reproduction	≥80%	
CRT Resolution	380TVL (CCD)	
Effective Pixels	480 (H) * 234 (V)	

Brightness Discrimination Rate	>8	
Signal System	NTSC/PAL	CCIR/EIA
Screen	4" CRT Monitors	
Connection	Four wire between the door station and the first monitor; Five wires between the monitors; Two wires between door station and the door lock.	
Power Consumption	≤14W(operation), ≤2W(standby)	
Auto Display Shut Time	30s±5s	
Working Temperature	0°C~40°C	
Dimension	190*228*70mm (W*H*D)	
<b>Outdoor Cameras</b>		
Image sensor	1/4" Sharp CCD	
Lens	3.6mm lens	
Min. Illumination	0.1Lux/F1.8	0.8Lux/F2.0
Diagonal View Angle	64°	
Video output signal range	1.0Vp-p/75Ω	
Talk SNR	>40dB	
Voltage/Consumption	DC12V-3W Supplied by Monitor	
Night Vision	White Light LEDs	Infrared LEDs
Working Temperature	-10°C ~ +50°C	
Material	Stainless Steel	

