

# INSTRUCTION MANUAL FOR 2 CHANNEL DVR MACHINE

## BUTTON INTRODUCTION



To change between record mode and playback mode


To manually snap picture while in record mode  
To perform a playback while in playback mode

To zoom screen while in record mode

To switch between primary channel and secondary channel while in record mode

To enter setting mode / To confirm setting

Navigation buttons

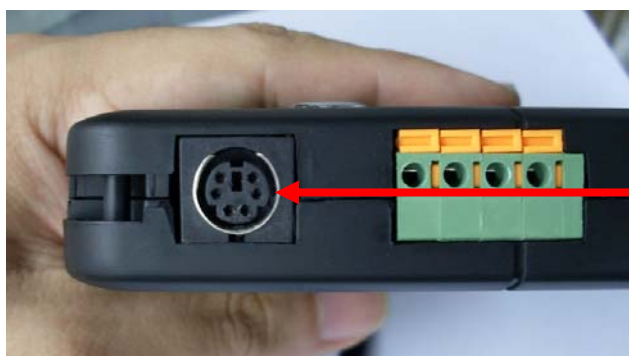

### 6-port connector

RED – 12VDC INPUT  
YELLOW – VIDEO 1 INPUT  
WHITE – VIDEO 2 INPUT  
BLACK – VIDEO OUTPUT (TO TV)

## **BASIC OPERATION**

### **TO PERFORM BASIC RECORDING / PLAYBACK**

- INSERT SD CARD
- SWITCH ON 2CH RECORDING CONSOLE
- PRESS <DISP> BUTTON TO TOGGLE BETWEEN PRIMARY SCREEN AND SECONDARY SCREEN RECORDING
- PRESS <MODE> BUTTON TO SWITCH BETWEEN PLAYBACK MODE OR RECORDING MODE
- PRESS <SNAP> WHILE IN PLAYBACK MODE TO SELECT VIDEO FILE TO PLAYBACK
- PRESS <ZOOM> IF YOU WISH TO ZOOM IN FURTHER IN THE PRIMARY SCREEN

### **TO PERFORM PLAYBACK ON COMPUTER / PC**

- SWITCH OFF 2CH RECORDING CONSOLE
- EXTRACT SD CARD AND INSERT INTO PC SD CARD SLOT
- IF YOUR PC DOES NOT HAVE A SD CARD SLOT, YOU MAY WISH TO PURCHASE A SD CARD TO USB CONVERTOR
- WAIT FOR PC TO PROMPT SD CARD CONTENT
- SELECT VIDEO / PICTURES TO VIEW AND DOUBLE CLICK
- VIDEO CAN BE PLAYED USING STANDARD WINDOW MEDIA PLAYER
- TO DELETE ALL FILES, SELECT FORMAT SD CARD

### **IMPORTANT : FORMAT SD CARD IN FAT32 FORMAT**

### **BASIC INITIAL SETUP (RECOMMENDED SETTINGS)**

PRESS <MENU> BUTTON  
UNDER MANUAL CAPTURE MODE,  
    SELECT <MOVIE CLIP>  
UNDER MOTION DETECT MODE,  
    MD > ON  
    RANGE > 1/1  
    TIME SLOT > 1s  
    SENSITIVITY > HIGH  
UNDER AUTO CAPTURE  
    AUTO CAPTURE > ON  
    PRI CAPTURE MODE > MOVIE 5s (RECOMMENDED)  
UNDER ADVANCE SETTING MODE,  
    PHOTO QUALITY > HIGH  
    MOVIE QUALITY > D1  
    TV OUTPUT STANDARD > PAL  
    FILE OVERWRITE SETTING > ON  
UNDER TIME/DATE MODE,  
    SET TIME/DATE > CHANGE TIME/DATE USING NAVIGATION BUTTON  
    WHEN FINISHED, PRESS <MENU> / <OK>  
    PHOTO TIMESTAMP > ON (RECOMMENDED)  
    MOVIE TIMESTAMP > ON (RECOMMENDED)